

## 1064nm fiber AOM (High power series)

| Product Overview:  | Acousto optic modulator is a kind of product that uses the principle of acousto-optic interaction to modulate the intensity and shift the frequency of laser. The wavelength range is from visible light to infrared region. It adopts all metal structure design, compact and solid sealed packaging structure, and innovative packaging technology, which ensure high reliability and temperature stability. |   |                                       |                                       |                   |
|--|--|---|---------------------------------------|---------------------------------------|-------------------|
| Performance<br>characteristics:  | Short response time Low insertion loss High extinction ratio High temperature stability and reliability Small size   |   |                                       |                                       |                   |
| Application area:  | Q-switched fiber laser Doppler coherent application Olltra fast laser frequency reduction menu Olinear frequency modulation  |   |                                       |                                       |                   |
| Ordering Information: This indicator is a typical optical wavelength indicator, and other wavelengths and frequencies can be selected. |  |   |                                       |                                       |                   |
|  |  | Single mode fiber is represented by "1", and single mode polarization maintaining fiber is represented by "1P". |                                       |                                       |                   |
| Parameter  | Unit   | SGTF120-1064-1FG<br>SGTF120-1064-1PFG   | SGTF150-1064-1FG<br>SGTF150-1064-1PFG | SGTF200-1064-1FG<br>SGTF200-1064-1PFG | SGTF300-1064-1PFG |

<3.5(SM fiber)

<3(PM fiber)

<4.5(SM fiber)

<3(PM fiber)

<2.5(SM fiber)

<2.5(PM fiber)


dB

Insertion loss


<5(SM fiber)

<3.5(PM fiber)

| Rise time                                 | ns  | <45                    | < 20 | <12 | <10 |  |
|---|-----|------------------------|------|-----|-----|--|
| shift frequency                           | MHz | 120                    | 150  | 200 | 300 |  |
| 3dB frequency shift bandwidth             | MHz | >20                    | >30  | >40 | >60 |  |
| Wavelength                                | nm  | 1030-1080              |      |     |     |  |
| Optical power                             | W   | ≤5W                    |      |     |     |  |
| On - off extinction ratio                 | dB  | ≥50                    |      |     |     |  |
| Polarization extinction ratio (PM device) | dB  | ≥20                    |      |     |     |  |
| Polarization dependent loss (SM device)   | dB  | <0.5                   |      |     |     |  |
| Driving power                             | W   | <2                     |      |     |     |  |
| Fiber type                                | 1   | PM980、HI1060 or others |      |     |     |  |
| Optical fiber connector                   | 1   | FG/APC                 |      |     |     |  |
| RF input joint                            | 1   | SMA                    |      |     |     |  |
| Fiber length                              | m   | >1                     |      |     |     |  |
| Input impedance                           | Ω   | 50                     |      |     |     |  |
| VSWR                                      | ı   | <1.3:1                 |      |     |     |  |
| Package                                   | -   | FG                     |      |     |     |  |

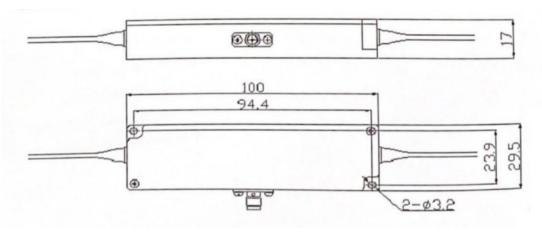


Package FG

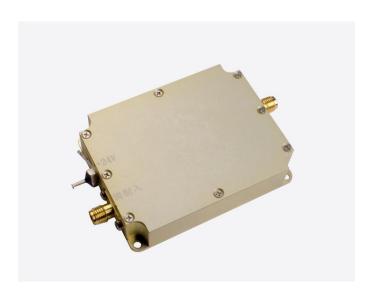

Low-power N-type acoustooptic driver

| Product Overview:                            | frequ<br>The f | Product overview: acoustooptic driver is a RF driver that provides supporting functions for acoustooptic device products. It is applicable to acoustooptic modulator and frequency shifter products with driving power less than 3W. The RF signal generated by the driver is used to generate ultrasonic waves in the crystal of the acoustooptic device. The frequency and intensity of the RF signal applied will determine the degree to which the beam is modulated, deflected or tuned. The drive has good heat dissipation, and the use of matched drive will bring better temperature stability. |   |                                       |  |  |
|--|----------------|--|---|---------------------------------------|--|--|
| Performance characteristics:                 | •Sma           | •Small size •Fast response time •Low power consumption •High temperature stability and reliability   |   |                                       |  |  |
| Supporting drive                             | -              | ` '  | use "Y" for frequency shift function<br>licates the package type; "A" - use "1"<br>use "D" for digital TTL modulatio<br>SGT150-33-N2-1D<br>SGT150-33-N2-1A1<br>SGT150-33-N2-1A5 | for power supply voltage 24V, "2" for |  |  |
| Specifications of modulation input interface |                |  |   |                                       |  |  |
| Modulated signal input                       | -              | Digital modulation (high level 3.3-5V; low level 0-0.2V@1k Ω)  Analog modulation (A1: 0-1V@50 Ω)  Analog modulation (A5: 0-5V@1k Ω)  |   |                                       |  |  |

| Interface                         | -   | SMA  |  |  |  |  |
|-----------------------------------|-----|--|--|--|--|--|
| RF output interface specification |     |  |  |  |  |  |
| Output signal frequency           | MHz | 120 150 200 300  |  |  |  |  |
| Frequency stability               | ppm | 20 (1 Special)   |  |  |  |  |
| Output signal power               | W   | <2   |  |  |  |  |
| Rise and fall time                | ns  | <25 <20 <10 <8   |  |  |  |  |
| Switching ratio                   | dB  | ≥60  |  |  |  |  |
| Harmonic suppression ratio        | dBc | >25  |  |  |  |  |
| Signal output standing wave ratio | ı   | ≤1.3   |  |  |  |  |
| Interface                         | 1   | SMA  |  |  |  |  |
| Complete machine specification    |     |  |  |  |  |  |
| Maximum power consumption         | W   | 10   |  |  |  |  |
| Working voltage                   | Vdc | 24±1V (Optional 12±0.5V)   |  |  |  |  |
| Power interface                   | -   | Through core capacitance (core wire is connected to positive, solder lug is connected to negative) |  |  |  |  |
| Package                           | -   | N/N2   |  |  |  |  |

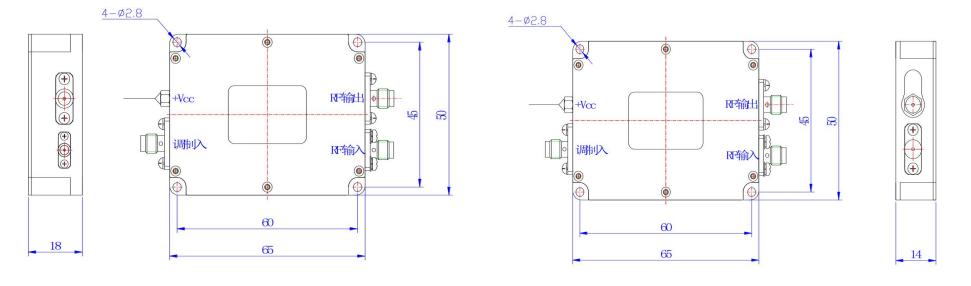

Package N2